

# SS208 series low cost pressure transmitters

all stainless steel integrated structure

- CE conformity
- Low cost and high quality
- Compact, rugged construction
- Stainless steel 316L diaphragm
- -40~105°C wider working temperature
- 0.5-4.5V, 0.5-5V, 1-5V, various voltage output
- Vented gauge, sealed gauge, absolute pressure
- A wide range of pressure and electrical connections



## Descriptions

SS208 series piezoresistive pressure sensors are the premium products of the SENDO OEM-line, it is a very classic sensor used in air, water, oil and other media compatible with stainless steel 316L, smart size, beautiful appearance, light weight only about 60g, all these make the SS208 series suitable to the applications with limited space and weight.

SS208 series are designed with all stainless steel structure, no elastic rubber component is used for sealing inside, a high performance piezoresistive pressure transducer is assembled in the housing, giving excellent long-term stability. The flexible pressure sensor programme covers absolute, sealed gauge and vented gauge versions, measuring ranges from 0- 15psi to 3000psi and a wide range of pressure and electrical connections.

Typical applications: automotive: monitor the oil pressure, fuel pressure and brake system, HVAC/R: monitor system performance for proper environmental control, air compressors: monitor compressor performance.

## Parameters

Supply voltage	5VDC	12VDC, 24VDC is on request
Output signal	0.5~4.5V	0.5~5V, 1~5V is on request
Measuring range	0~15psi...3000psi	
Proof pressure	2.0*F.S.	
Accuracy	1%F.S. @25°C	
	3%F.S. @-20~105°C	
Operating temp	-40~105°C	


## Mechanical configurations

Pressure connection	See "ordering information"
Electrical connection	3way round Packard
Sealing rating	IP65
Housing	Stainless steel 304
Diaphragm	Stainless steel 316L

# SS208 series low cost pressure transmitters

all stainless steel integrated structure

## Drawings & electrical connections

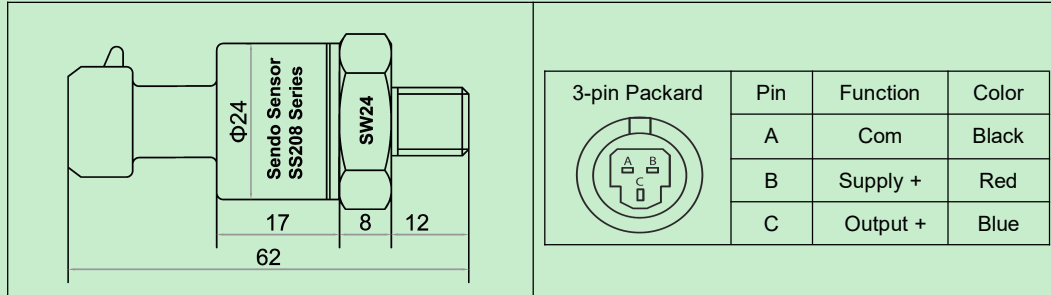

## Ordering information

EXAMPLE: [SS208 F 01 A 03 A 01 A](#)

1	Pressure range	F
	A 15psi B 30psi C 50psi D 75psi E 100psi F 150psi G 7bar H 10bar I 16bar J 25bar K 40bar L 60bar M 100bar N Other range is on request	
2	Pressure type	01
	01 Gauge 02 Absolute	
3	Electrical connection	A
	A 3way round Packard	
4	Pressure connection	03
	01(1/4"NPT) 02(1/2"NPT) 03(1/8"NPT) 04(G1/4") 05(G1/2") 06(G1/8") 07(PT1/4") 08(PT1/2") 09(PT1/8") 10(Other pressure connection is on request)	
5	Voltage supply	A
	A 5VDC B 12VDC C 24VDC	
6	Output signal	01
	01 0.5~4.5V 02 1~5V 03 0.5~5V 04 Other output signal is on request	
7	Mating cable(Pig tail)	A
	A None B 30cm C 1m D 2m E 3m F 4m G 5m H Other length is on request	

## Contact us

Company name	Ninghai sendo sensor co., Ltd		
Company address	Floor 5, building 2, no.48 jiuhan road, jianggan district, 310000 Hangzhou, China		
Website	<a href="http://www.sendo-sensor.com">http://www.sendo-sensor.com</a>		
Email(sales)	<a href="mailto:sales@sendo-sensor.com">sales@sendo-sensor.com</a>		
Email(Mr Chen)	<a href="mailto:cain.chen@sendo-sensor.com">cain.chen@sendo-sensor.com</a>		
Skype	sendosensor		
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884	

\*Specifications subject to change without notice, the latest date sheet please contact: [sales@sendo-sensor.com](mailto:sales@sendo-sensor.com)