


SS117 series miniature flush diaphragm pressure transducers

Features

- G1/4" flush connection
- High accuracy and reliability
- Stainless steel 316L wetted parts
- 1.0mA, 1.5mA constant current supply
- 5VDC, 10VDC constant voltage supply
- 0-70°C temperature compensation range
- Isolated construction, able to test various media
- Absolute, vented gauge and sealed gauge pressure

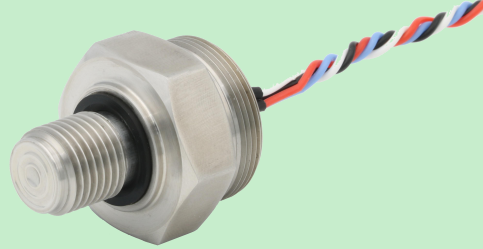

Technical data

Power supply	1.5mADC	5VDC(optional)	10VDC(optional)
Zero output	0±2mVⓈ		
Span output	100±20mVⓈ		
Accuracy	0.25%F.S.Ⓢ		
Overload range	2.0 × F.S.(<25MPa)		
	1.5 × F.S.(≥25MPa)		
Compensated temp range	0°C → 70°C		
Operating temp range	-20°C → 100°C		
Storage temp range	-40°C → 125°C		
Zero thermal error	≤0.02% F.S./°C		
Sensitivity thermal error	≤0.02% F.S./°C		
Stability	≤0.2% F.S./Year		
Input impedance	2.3KΩ → 4KΩ		
Insulation resistance	>100 MΩ at 250 V		
Vibration	20g/(20~5000Hz)		
Endurance	>100 x 10 ⁶ F.S. cycles		

Ⓢ: The zero output, span output and accuracy may different if the supply power, measuring range and pressure type is different, please contact us if you need more details.

Electrical connections

wires		Pins connection mode 1		Pins connection mode 2	
Color	Function		PIN1: Supply +		PIN1: Supply +
Red	Supply +		PIN2: Output -		PIN2: Output +
Black	Supply -		PIN3: Supply -		PIN3: Supply -
White	Output +		PIN4: Supply -		PIN4: Supply -
Blue	Output -		PIN5: Output +		PIN5: Output -

SS117 series miniature flush diaphragm pressure transducers

Ordering information

EXAMPLE: **SS117 PA 01 A 01 A**

1	Pressure range(bar)	PA
	PA(25) PB(40) PC(60) PD(100) PE(160) PF(200) PG(250) PH(400) X(Other pressure range or unit is on request)	
2	Pressure type	01
	01(Gauge)	
3	Electrical connection ^②	A
	A(4Wires) B(5Wires) C(4Pins mode 1) D(4Pins mode 2) E(5Pins mode 1) F(5Pins mode 2)	
4	Pressure connection	01
	01(G1/4") 02(Other connection is on request)	
5	Power supply	A
	A(1.5mADC) B(5VDC) C(10VDC) D(Other supply is on request)	

②: 4Wires and 4Pins connection: the zero signal is set by SENDO SENSOR before leave factory.

②: 5Wires and 5Pins connection: the zero signal can be set by clients.

②: Pins Mode1 and Mode2: please see the details in the Electrical connection in page 2.

Optional(please contact us for more details)

1	Integrate the MCP9700 temp sensor
	A(YES) B(NO)
2	Material of diaphragm
	01(Titanium) 02(Tantalum) 03(Hastelloy-C)
3	Material of housing
	A(Titanium) B(Tantalum) C(Hastelloy-C)

Contact us

Company	Ningbo Sendo Electronic Technology CO., LTD	
Email	sales@sendo-sensor.com	
Email	cain.chen@sendo-sensor.com	
Factory	Floor 5, building 2, no.48 jiujuan road, jianggan district, 310019 China	
Office	Building. 1#1108, Wante business center, Hi-Tech, 315040 China	
Website	http://www.pressuresensorsuppliers.com	http://www.sendo-sensor.com
Skype: sendosensor	We Chat: chenjie4884	WhatsApp: +8613616574884
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884

*Specifications subject to change without notice, the latest date sheet please contact: sales@sendo-sensor.com