

SS635 series IP68 grade water-proof pressure sensors

Descriptions

SS635 series water-proof pressure sensors are designed by piezoresistive technology, enhanced double O-ring(viton) structure guarantee the IP68 grade protection, suitable for liquid level or depth measurement. The hermetically sealed housing makes the sensor suitable for immersion in almost all kinds of industrial liquids and oils.

SS635 series is fitted with a traditional G1/2" pressure connection (various pressure connections/thread can be customized by SENDO powerful customization system), as standard to give the best in media compatibility, available with standard voltage and 4-20mA current outputs, give accurate readings at pressure ranges from 100 mBar.



Technical data

Performance (EN 60770)

Accuracy @25°C	±0.5% F.S.(incl. non-linearity, hysteresis and repeatability)
Response time	< 4 ms
Pressure range	0...100mbar to 20bar
Overload pressure	2.0 × F.S.
Pressure type	vented gauge
Long term stability	≤0.2%F.S./Year
Temperature coefficient	±0.03%F.S./°C

Electrical specifications

Output signal	4-20mA	0-10V	0-5V/0.5-4.5V	0.5-4.5V
Supply voltage	9-30Vdc	12-30Vdc	9-30Vdc	5Vdc
Polarity protected	yes	yes	yes	yes
Short-circuit protected	yes	yes	yes	yes
Zero and span adjustment	No	No	No	No
Surge protection	yes	yes	yes	yes

Environmental conditions


Medium temp range	-20°C → +85°C
Ambient temp range	-20°C → +80°C
Compensated temp range	0°C → +50°C
EMC - Emission	EN 61000-6-3
EMC - Immunity	EN 61000-6-1
Insulation resistance	>100 MΩ at 250 V

SS635 series IP68 grade water-proof pressure sensors


Mechanical characteristics

Materials	Diaphragm	Stainless steel 316L(typical)	More options see Page 3
	Housing	Stainless steel 304(typical)	Stainless steel 316L(optional)
	Pressure connection	Stainless steel 304(typical)	More options see Page 3
	Cable	PU(typical)	PE(optional)
	O-ring	Viton	
Pressure connection	G1/2"	G1/4"(optional)	M20*1.5(optional)
Weight	0.5 - 5.0 kg(dependent on cable length)		
Sealing rating	IP68(fulfilled together with mating connector)		

Electrical connections

4-20mA(current signal)	Red: Voltage +		Black: Signal +
0-10V/0-5V/0.5-4.5V	Red: Voltage +	Black: GND	Blue: Signal +

Dimensions(Unit: mm)

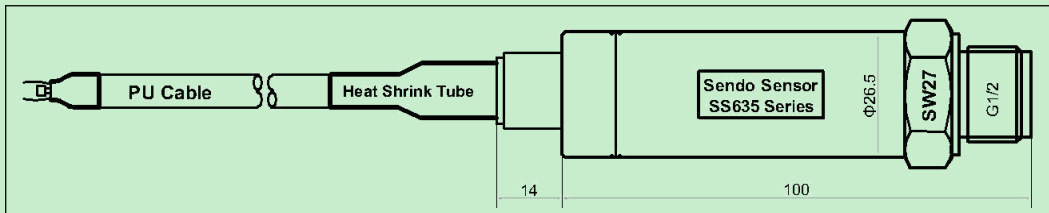

Installation and precautions

- The installation place should be easy to operation and fixing
- When installation, the metal probe should sink to the bottom of the container
- The installation place should be away from the heat source as far as possible
- The installation place should be away from the vibration source as far as possible
- If the customer need to connect with other cable, waterproofing measures must be taken
- When the sensor put into the water, it is the best that the sensor can be fixed, and away from the inlet

Precautions for safety use

- Clean the metal probe(sensor) regularly to avoid block the pressure port
- The cable is a special waterproof cable, abrasion, puncture, and cut the cable is not allowed
- The wiring should strict reference to the electrical connection, wrong wiring will cause damage to the sensor
- A stainless steel 316L diaphragm is in the front part of the sensor, artificially foreign body touch is not allowed

SS635 series IP68 grade water-proof pressure sensors

Ordering information

EXAMPLE: [SS635 PJ 04 A 01](#)

1	Pressure range(bar)	PJ
	NA(-1...0) NB(-0.7...0) NC(-0.35...0) ND(-0.2...0) NE(-0.1...0) PA(0.1) PB(0.2) PC(0.35) PD(0.7) PE(1.0) PF(1.6) PG(2.5) PH(4.0) PI(6.0) PJ(10) PK(16) PL(25) PM(40) PN(60) PO(100) PP(160) PQ(200) PR(250) PS(400) PT(600) PU(1000) CA(-1...0.6) CB(-1...1.5) CC(-1...3) CD(-1...5) CE(-1...9) CF(-1...15) CG(-1...24) X(Other pressure range or unit is on request)	
2	Cable length	04
	01(2m) 02(5m) 03(8m) 04(10m) 05(12m) 06(15m) 07(20m) 08(25m) 09(30m) 10(Other length is on request)	
3	Pressure connection	A
	A(M20*1.5) B(G1/4") C(G1/2") D(Other pressure connection is on request)	
4	Signal & supply	01
	01(4-20mA & 9-30Vdc) 02(0-10V & 12-30Vdc) 03(0-5V & 9-30Vdc) 04(0.5-4.5V & 9-30Vdc) 05(0.5-4.5V & 5Vdc)	

Optional(please contact us for more details)

1	PE cable
	A(YES) B(NO)
2	Material of diaphragm
	01(Titanium) 02(Tantalum) 03(Hastelloy-C)
3	Material of housing
	A(Titanium) B(Tantalum) C(Hastelloy-C) D(Stainless steel 316L)

Contact us

Company	Ningbo Sendo Electronic Technology CO., LTD	
Email	sales@sendo-sensor.com	
Email	cain.chen@sendo-sensor.com	
Factory	Floor 5, building 2, no.48 jiujuan road, jianggan district, 310019 China	
Office	Building. 1#1108, Wante business center, Hi-Tech, 315040 China	
Website	http://www.pressuresensorsuppliers.com	http://www.sendo-sensor.com
Skype: sendosensor	We Chat: chenjie4884	WhatsApp: +8613616574884
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884

*Specifications subject to change without notice, the latest date sheet please contact: sales@sendo-sensor.com



WARNING: DO NOT USE THIS PRODUCT AS SAFETY OR EMERGENCY STOP DEVICE OR IN ANY OTHER APPLICATION WHERE FAILURE OF THE PRODUCT COULD RESULT IN PERSONAL INJURY OR EVEN DEATH.